


# DALI PHANTOM CI AMP-4125 DSP


## QUICK START GUIDE

### Pack contents


1 x Amplifier unit




2 x Two channel balanced  
input connector



2 x Two channel  
output connector



1 x GPIO socket connector




1 x Mains power cable




4 x Adhesive rubber feet



1 x Document pack



### Installation

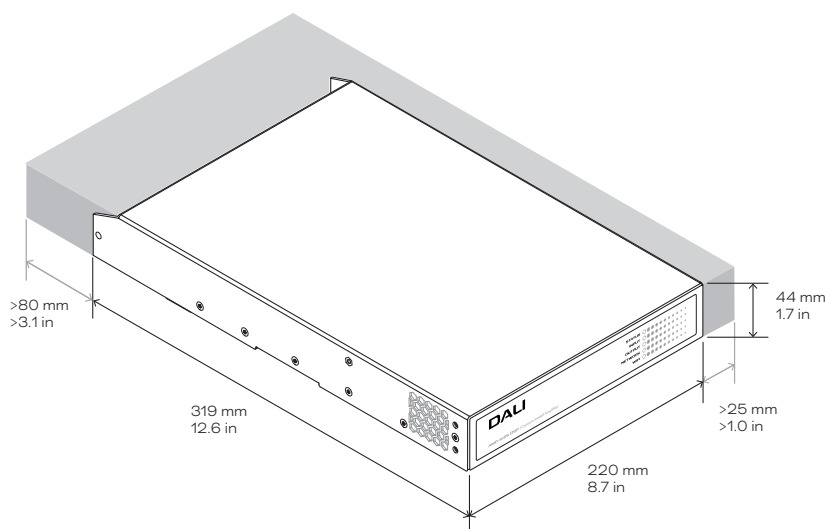

Grey regions illustrate ventilation space requirements.



For rack mount installation the DALI CI AMP - 1 RU Rack Mount Kit can be purchased as an accessory. Contact your DALI dealer for more information.




For free-standing installation attach the supplied adhesive feet to the amplifier underside.




Do not switch on the amplifier until all input and output connections have been made.

### Connections

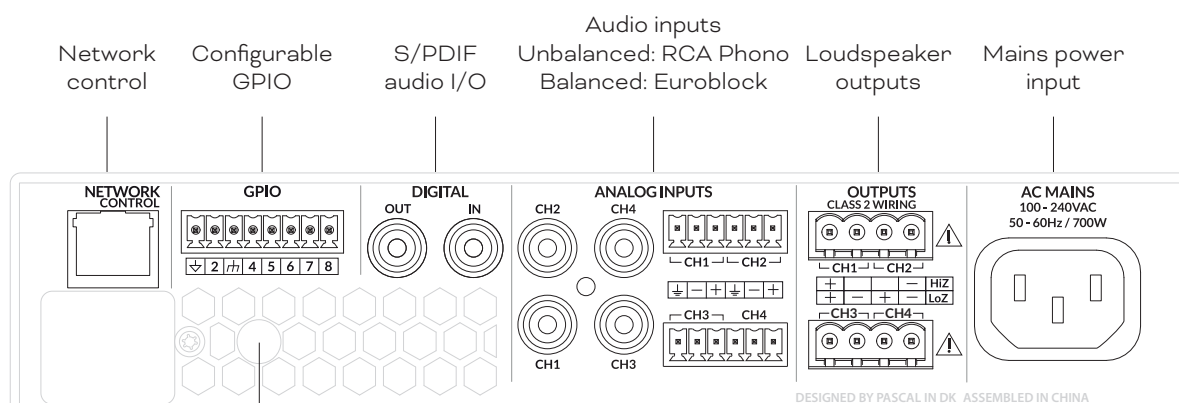


WiFi antenna  
Do not touch!

## Unbalanced analogue input connections

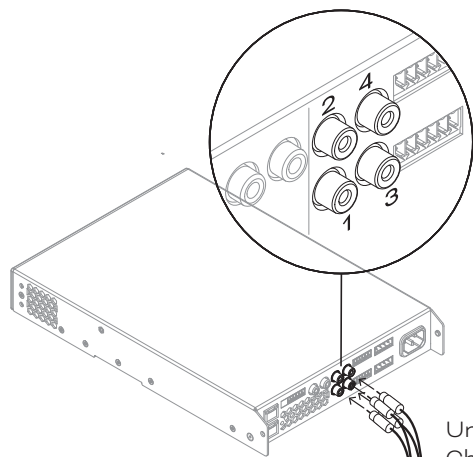


Unbalanced line inputs:  
Channels 1 to 4

## Balanced analogue input connections

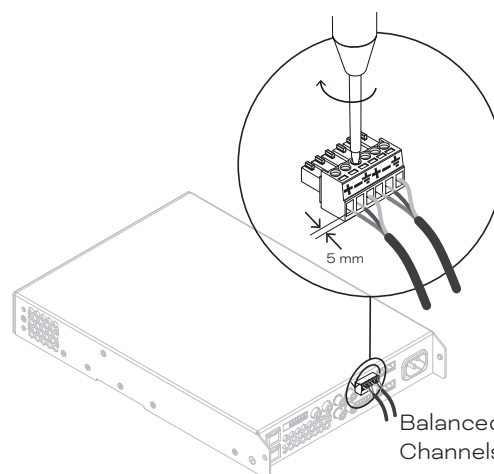


Balanced line inputs:  
Channels 1 to 4


## Speaker output connections

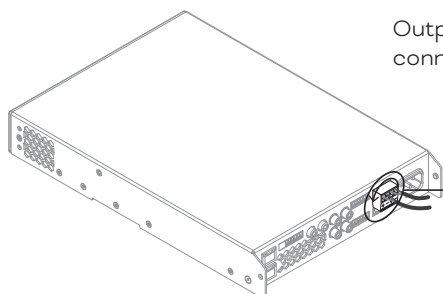

Output cable connections

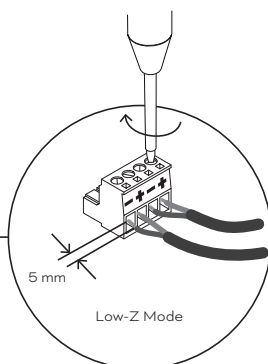


Low-Z Mode

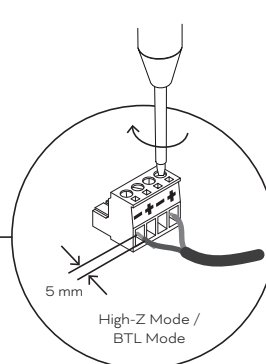

High-Z Mode /  
BTL Mode


## AMP CONFIGURATOR - Wi-Fi connection

**1** Power on your amplifier

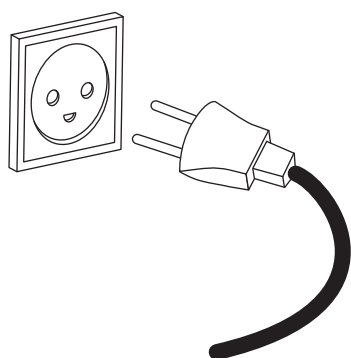


**2** Connect to the amplifier with Wi-Fi

Password: **password**

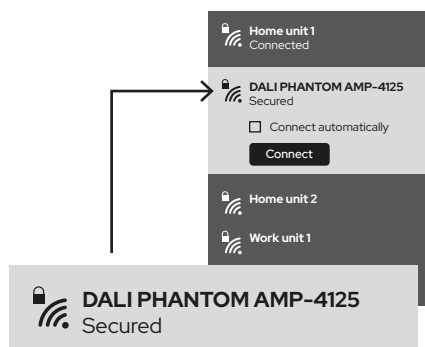

**3** Open web browser and type 192.168.4.1

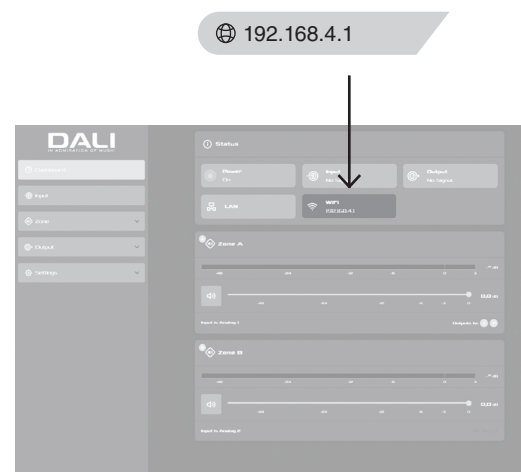

## Congratulations with your new DALI PHANTOM AMP

For the best experience, we recommend that you download and install the latest firmware, our DALI PHANTOM speaker presets and how-to-guides from the DALI website.

To access the links, simply scan the QR code below, select your product and navigate to the Downloads section.

