

ANTHEM®

STR POWER AMPLIFIER

STR POWER AMPLIFIER TWO-CHANNEL REVOLUTION



The All New STR Power Amplifier



The STR Power Amplifier is the beating heart of a world-class 2-channel sound system. It delivers massive power generation, with audiophile-quality output in a smartly designed component.

Imagine doling out 400 Watts/channel into 8 ohms (both channels driven). Now visualize a massive 600 Watts/channel into 4 ohms, and an astonishing 800 Watts/channel into 2 ohms! The STR Power Amp delivers true no-holds-barred performance.

Packed with Innovative Electronics

Inside, the STR Power Amplifier uses two colossal transformers and multiple high-current output devices so the most subtle details and dynamic peaks are handled equally well. Outside, its beautifully designed cosmetics, including a 7-inch graphic control display and secure, highly conductive audiophile connectors provide a perfect match to the STR Preamplifier.

FEATURES & FUNCTIONS

- 400W / 600W / 800W continuous into 8 / 4 / 2 ohms, both channels driven
- Cascoded complementary feedback input stage
- Sixteen bipolar output devices per channel
- Dual Mono Design
- Massive toroidal transformers
- Soft turn-on
- Four power on/off options
- No rail fuses
- Advanced Load Monitoring™ Technology
- Graphic front panel display for the power meter, status, and easy setup navigation



STR Power Amplifier pictured with STR Preamplifier (sold separately). Both models available in black or silver finishes.

FEATURES

Cascoded Complementary Feedback Input Stage

The STR Power Amplifier benefits from our proprietary input topology — a unique departure from the classic differential input stage. Eight low-noise bipolar input devices are configured in a complementary active-loaded cascoded feedback arrangement for reduced distortion, exceptionally linear response and superior bandwidth. Transistors in critical stages are hand-selected and matched for lowest possible distortion.

Sixteen Bipolar Output Devices Per Channel

Anthem engineers incorporated sixteen bipolar output devices per channel, resulting in high peak power capability, effortlessly reproducing even the most challenging material. The use of multiple bipolar output devices in class AB configuration also dramatically reduces distortion while ensuring extreme linearity, extensive bandwidth, and stress-free reliability. Experience the immense dynamics of up to 800 clean watts delivered into demanding 2-ohm loads, or 400W into 8 ohms/600W into 4 ohms continuously and with both channels driven.

Massive Toroidal Transformers

Conservatively rated, in a low-profile design shaped to minimize hum, the low-impedance toroidal power transformers — one for each channel — make no sacrifices when it comes to delivering a supply of pure, clean, low-noise power. Both the power supply impedance and internal cabling inductance are minimized to deliver an unobstructed path for maximum power. This allows the two amplifier channels to produce stable, continuous power at maximum output without affecting one another, even when


driving the lowest impedances. While some amplifiers oscillate or run out of power when driving lower impedance loads, the STR Power Amplifier remains perfectly stable under all conditions.

Soft Turn-On

A sequence-controlled soft turn-on significantly reduces power line transients and in-rush current during start up, thereby preventing accidental tripping of circuit breakers.

Power On/Off Options

In addition to the traditional options for power-on, the STR Power Amplifier allows trigger mode and audio signal sensing to be combined so you would never need to think about turning the

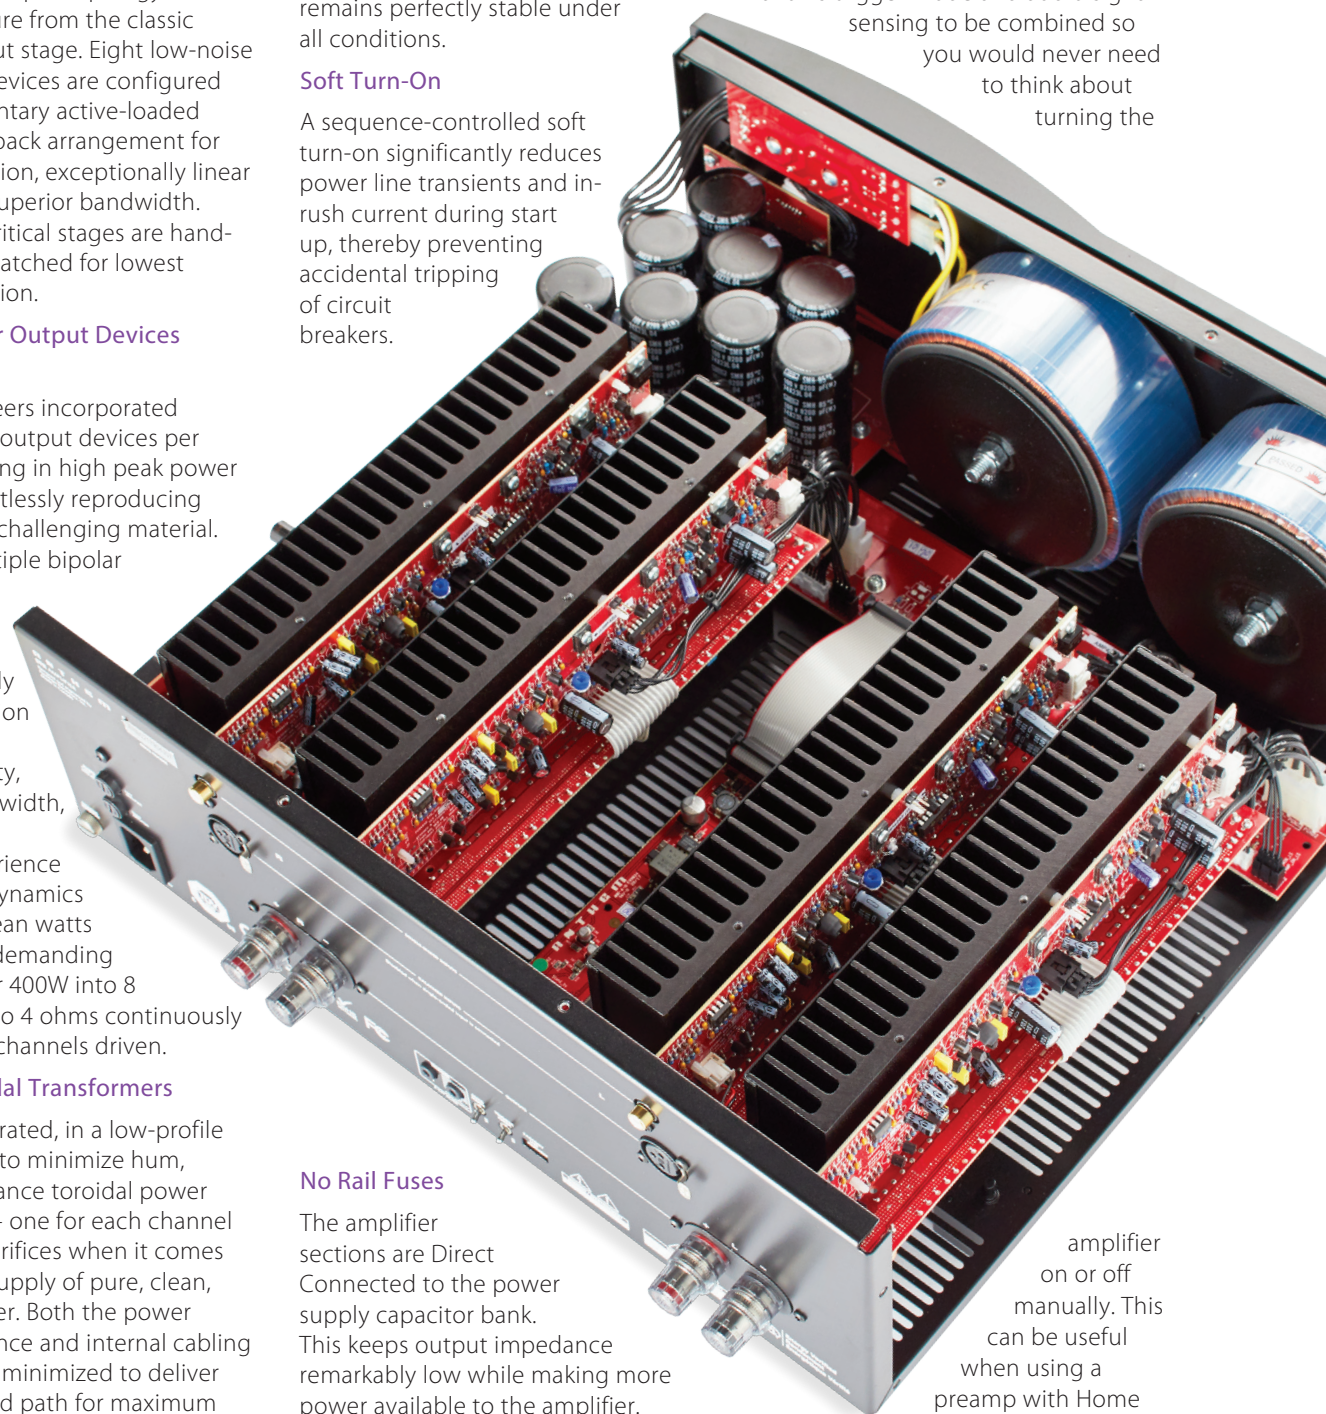

No Rail Fuses

The amplifier sections are Direct Connected to the power supply capacitor bank. This keeps output impedance remarkably low while making more power available to the amplifier.


Even when driving lower or complex impedance loads, the result is audibly superior performance.

amplifier on or off manually. This can be useful when using a preamp with Home Theater Bypass mode together with a surround sound processor in the same system.

FEATURES

Advanced Load Monitoring™ Technology

Exclusive ALM™ technology monitors internal temperature, current and voltage to ensure safe and uninterrupted long-term operation. ALM is not in the signal path, so it never gets in the way. Instead, ALM engages instantly, but only in the most extreme circumstances, to protect your amplifier and speakers from damage, while lowering the chance of a line fuse blowing during an over-current condition. The front panel display confirms status at all

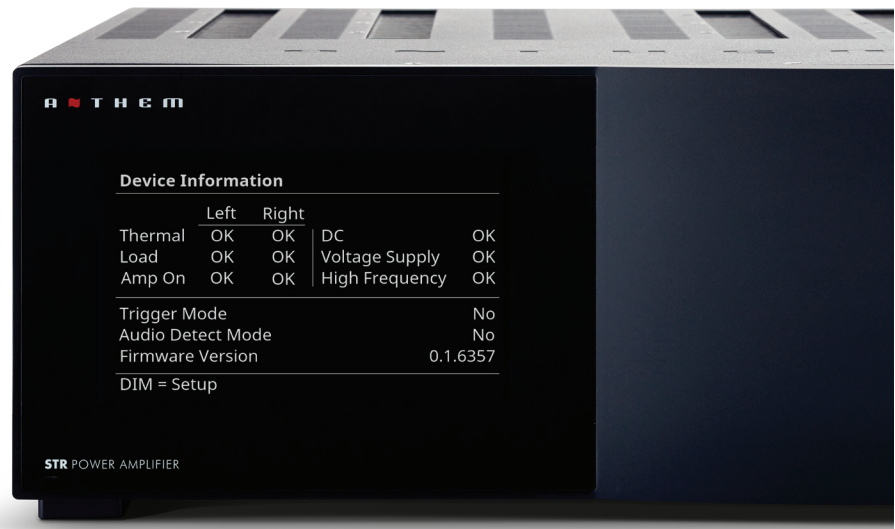

STR Power Amplifier Rear Panel

TECHNICAL SPECS

STR Power Amplifier

Output (per channel, continuous, 20 Hz - 20 kHz, <1% THD)	400 W (8 Ω), 600 W (4 Ω), 800 W* (2 Ω)
THD (400 W)	0.0007% (1 kHz), 0.004% (20 kHz)
IMD (300 W)	
ITU-R (19 kHz + 20 kHz)	0.0006%
SMPTE (60 Hz + 7 kHz)	0.0016%
SNR (IEC-A, ref. 400 W)	121 dB
Frequency Response (20 Hz - 20 kHz)	$\pm$ 0.1 dB
Power Bandwidth (-3 dB at 400 W into 8 ohms)	91 kHz
Slew Rate	30 V/ μ s
Damping Factor (20 Hz - 1 kHz)	360
Channel Separation	101 dB (100 Hz), 98 dB (10 kHz)
Input Impedance	10 k Ω (RCA), 15 k Ω (XLR)
Input Sensitivity (for 400 W into 8 Ω)	2.1 Vrms
Voltage Gain	29 dB

Power Requirement

120V version: In countries where the line voltage is 120V, this product operates from a single phase AC power source that supplies between 108V and 132V at a frequency of 60 Hz.

220V-240V version: In countries where the line voltage is 220V, 230V, or 240V, this product operates from a single phase AC power source that supplies between 198V and 264V at a frequency of 50 Hz.

Power Consumption

Standby	310 mW
Idle	65 W
Typical Playback Levels	150 W - 300 W
High Playback Levels	600 W - 1100 W

Dimensions

Height	6-3/4" (17.2 cm)
Width	17" (43.2 cm)
Depth (not including power cord)	18-1/2" (47 cm)
Weight (unpacked)	60 lb (27.3 kg)

*Maximum 3 seconds due to high current draw.

ANTHEM®

Copyright © Paradigm Electronics Inc. All rights reserved. We reserve the right to change specifications and/or features without notice as design improvements are incorporated. www.anthemAV.com.